



The CTM Front / Back / Wrap System is a fully automatic, high quality, competitively priced labeling system designed around the customer's exact labeling need.



***Setting Global Standards***  
*One Customer at a Time*

[www.ctmlabelingsystems.com](http://www.ctmlabelingsystems.com)

# Front / Back / Wrap

## Features:

The CTM Front / Back / Wrap System is a fully automatic, high quality, competitively priced labeling system designed around the customer's exact labeling need. The unit is an open frame design that can accommodate any of CTM's fine line of advanced 360a or 3600a-PA "touch screen" applicators or print and apply units for merge, air blow and tamp blow label attachments.

The short pitch, high performance acetal chain allows low friction and dry running on the hard anodized, Teflon impregnated extruded aluminum sideframes. Continuous t-slots provide easy component mounting and adjustability, and all labeler mountings include ball bushing traverse slides as standard.

To accommodate various products CTM appropriately sizes conveyors from 2.3" to 18" wide and from 4 ft. to 12 ft. as standard.

The top holddown belt is servo motor driven to precisely follow the conveyor velocity throughout it's full range up to 90 ft. per minute as standard, and to 120 ft. per minute optional.

Feedscrew, belt aligner and meter wheel orienting and spacing devices develop the demanding accuracies required by challenging applications. A wrap belt assembly can be included for wrap around applications when required on the same process.

## Standard Features:

- Nema 4 main enclosure
- OSHA Lock-out
- Slanted console operator station
- Heavy duty welded tubular steel main frame
- "Steel-It" paint
- Heavy duty motor and gearbox
- Aerotech servo, Maple Systems color touch screen display controls



## Electrical:

108-132 Volts AC (208V, 220V optional)

10-20 Amps, 50/60 Hertz, Single Phase

## Environmental:

Operating: 40° F to 105° F (5° C to 40° C)

Storage: -4° F to 105° F (-20° C to 40° C)

## Optional Features:



- Stainless steel frame
  - Encoder speed following for labelers
  - Stack light(s)
  - Label on product scanning and eject
  - Pneumatic – required with certain features
- Consult CTM Labeling Systems for other options

## System dimensions:

Varies, approx. 75" height, to 96" width, to 144" long

## Weight:

Approx. 1200 lbs.

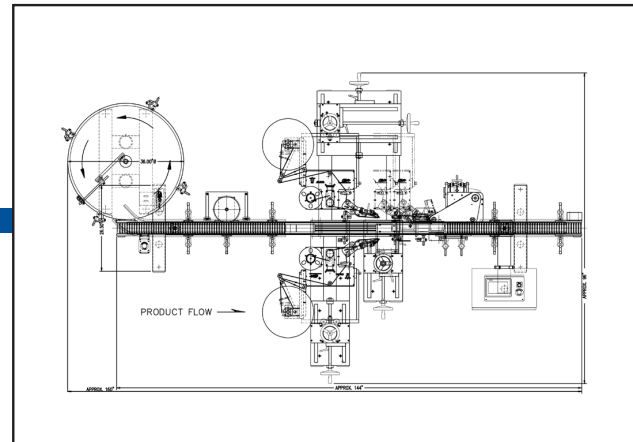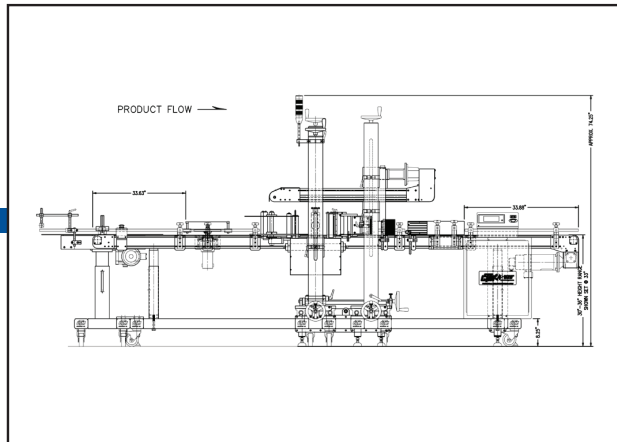

NOTE: System dimensions and options shown vary by application.

Distributed By:



1318 Quaker Circle  
P.O. Box 589  
Salem, Ohio 44460  
(330) 332-1800

[www.ctmlabelingsystems.com](http://www.ctmlabelingsystems.com)



Front Back Wrap/1116

